



Formula X-TREME™

ULTRA HIGH PERFORMANCE STRIPPER



With a concentrated, powerful, non-ammoniated formula, **Formula X-Treme** cuts through heavy build-up and hard to remove water-based sealers in record time.

DIRECTIONS

Read all directions and Safety Data Sheets (SDS) before using.


- Mix stripper with cold water per the following dilutions:
 Heavy coating removal: 1:20 (6.4 US oz per gallon/50 ml per 1 liter water).
 Normal coating removal: 1:30 (4.3 US oz per gallon/34 ml per 1 liter water).
 Light coating removal: 1:40 (3.2 US oz per gallon/25 ml per 1 liter water).
- Apply solution liberally to the floor and allow to soak for 10 minutes ensuring the solution does not dry.
- Scrub floor with automatic scrubber or stripping machine. Pick up dirty solution with automatic scrubber or wet vac.
- Rinse thoroughly with clean water and allow floor to dry completely before applying any finish.

Note: Test floor for color fastness in an inconspicuous area.

PRODUCT INFO

Product Code	549FS	549FSE	549MP	549MPE
Volume	2.50 US gallons	10 liters	1.06 US gallons	4 liters
Shipping Package	2 x 2.5 gallons	2 x 10 liters	4 x 1.06 gallons	4 x 4 liters
Pallet Quantity	48	48	48	48

SURFACES

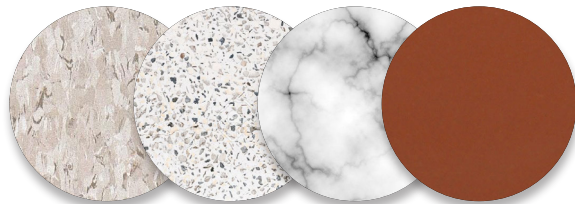

VCT TERRAZZO MARBLE QUARRY TILE

TECHNICAL DATA

Description	Non-ammoniated, ultra high performance stripper
Appearance	Clear liquid
Viscosity (Brookfield) @ 68°F (20°C)	<20 centipoise
Flash Point ASTM D56-05 (2010)	144°F (62°C)
VOC 40 CFR Part 59 Subpart C	60% (as supplied) 2.8% (1:20) 1.90% (1:30) 1.43% (1:40)
Fragrance	None added
Shelf Life ASTM D1791-93 (2008)	2 years
Density ASTM D1475-98 (2008)	8.2 lb/gal @ 68°F 0.98 kg/L @ 20°C
Container	2.5 US gal/9.5 L (FS packaging) 2.64 US gal/10 L (FSE packaging) 1.06 US gal/4 L (MP packaging) 1.06 US gal/4 L (MPE packaging)

